

Model #: FXT 216  
Serial #: U1103-1895



L: 12' 1"  
W: 7' 4"  
H: 11'

# FXT Cooling Tower

## TABLE OF CONTENTS

Shipping Weight: 3,560  
Operating Weight: 9,420

---

B135 FXT COOLING TOWER

---

B144 ENGINEERING DATA

---

B138 CONSTRUCTION DETAILS


---

B146 STRUCTURAL SUPPORT

---

B139 CUSTOM FEATURES & OPTIONS

# FXT Engineering Data

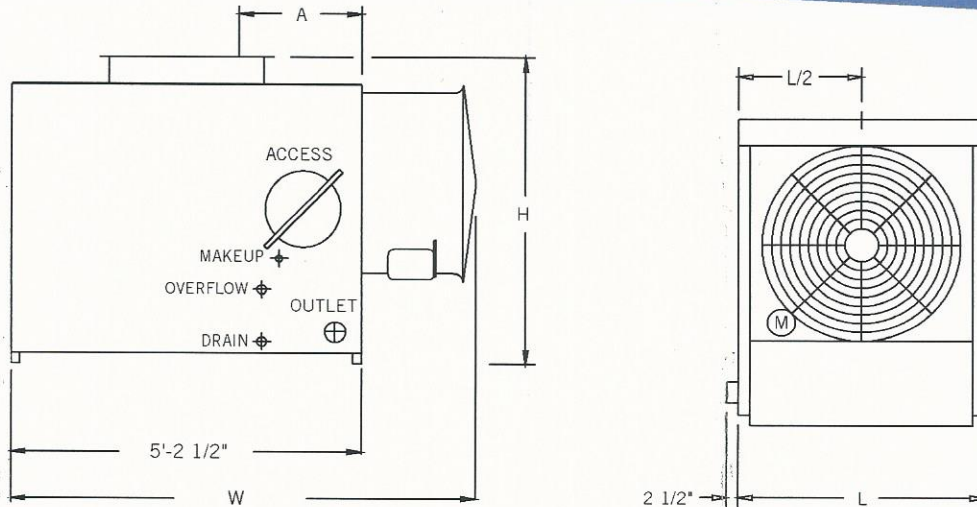

Models FXT-58 and 68

Model Number	Nominal Tonnage	Motor HP	Airflow (CFM)	Dimensions				Weights (lbs)		Connection Sizes	
				L	W	H	A	Operating	Shipping	Inlet	Outlet
FXT-58	58	3	18,500	6'-1"	7'-4"	7'-4"	1'-5"	3,140	1,220	6"	6"
FXT-68	68	5	21,700	6'-1"	7'-4"	7'-4"	1'-5"	3,150	1,230	6"	6"
FXT-74	74	3	21,800	6'-1"	7'-4"	8'-4"	4'-2"	4,230	1,720	8"	8"
FXT-87	87	5	25,600	6'-1"	7'-4"	8'-4"	4'-2"	4,240	1,730	8"	8"
FXT-95	95	7.5	29,100	6'-1"	7'-8"	8'-4"	4'-2"	4,280	1,770	8"	8"
FXT-115	115	5	33,900	9'-2"	7'-4"	8'-4"	4'-2"	6,080	2,220	8"	8"
FXT-130	130	7.5	38,300	9'-2"	7'-4"	8'-4"	4'-2"	6,120	2,260	8"	8"
FXT-136	136	10	41,800	9'-2"	7'-8"	8'-4"	4'-2"	6,160	2,300	8"	8"
FXT-160	160	7.5	47,100	12'-1"	7'-4"	8'-4"	4'-2"	8,030	2,880	8"	8"
FXT-175	175	10	51,500	12'-1"	7'-4"	8'-4"	4'-2"	8,070	2,920	8"	8"
FXT-192	192	15	58,900	12'-1"	7'-8"	8'-4"	4'-2"	8,120	2,970	8"	8"
FXT-216	216	10	56,400	12'-1"	7'-4"	11'-0"	3'-8"	9,420	3,560	8"	8"
FXT-240	240	15	65,300	12'-1"	7'-8"	11'-0"	3'-8"	9,470	3,610	8"	8"
FXT-257	257	20	70,000	12'-1"	7'-8"	11'-0"	3'-8"	9,490	3,630	8"	8"

## NOTES:

1. Unless otherwise indicated, all connections 4" and smaller are MPT and connections 6" and larger are beveled for welding.
2. Operating weight is based on the water level in cold water basin at overflow height.
3. Nominal tons of cooling represents the capability to cool 3 USGPM of water from a 95°F entering water temperature to an 85°F leaving water temperature at a 78°F entering wet-bulb temperature.

**Do not use for construction.** Refer to factory certified dimensions. This catalog includes data current at the time of publication, which should be reconfirmed at the time of purchase.